
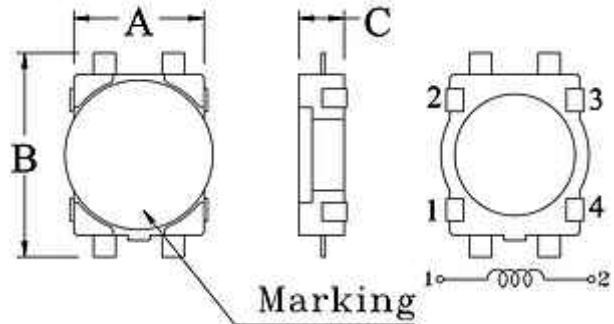


SMD Power Inductor – SCMD Series

SCHMID-M

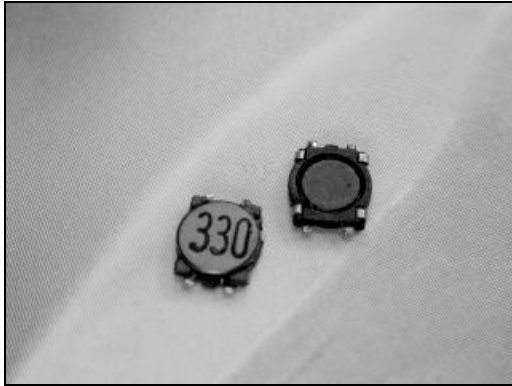

Features


- Thinnest power coil
- Ceramic cover provides best possible surface for pick and place handling
- Perfect for small cards

Dimensions

Part No.	A	B	C
SCMD0401	4.4 Max.	5.8 Max.	1.2 Max.
QTY/REEL	5000pcs.		

Ordering Information

SCMD 0401-4R7 M

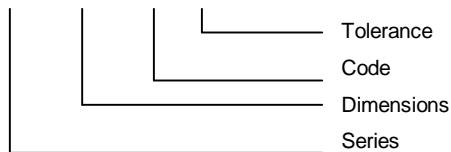

Characteristics

Tolerance: M = $\pm 20\%$, M tolerance is standard.

Part No.	L (μH)	Test Frequency (KHz)	RDC Max. (Ω)	IDC Max. (A)
SCMD0401-2R2M	2.2	100	0.116	0.95
SCMD0401-3R3M	3.3	100	0.174	0.77
SCMD0401-4R7M	4.7	100	0.216	0.75
SCMD0401-6R8M	6.8	100	0.296	0.62
SCMD0401-100M	10	100	0.457	0.50
SCMD0401-150M	15	100	0.676	0.40
SCMD0401-220M	22	100	1.066	0.30
SCMD0401-330M	33	100	1.647	0.24
SCMD0401-470M	47	100	2.843	0.18